



5-in-1



Emergency Exit Sign



Emergency Exit Sign

The 5-in-1 emergency exit sign means you will always have the correct mounting method. The 5-in-1 is supplied with a full legend set and is further enhanced by our unique remote control testing option. It can be installed in both switchable maintained or non-maintained option.

Features

- Maintained or non-maintained 3 hour emergency back-up
- Incorporates LiFePO4 3.2V 1500mAh battery
- Low environmental impact
- Minimal maintenance
- Meets BS EN 60598-2-22 and other relevant standards

5 Mounting options supplied as standard:


- Wall
- Ceiling
- Flag
- Recessed



Optional Remote Control

- Press once for 5 second monthly test
- Press twice for 3 hour yearly test
- LED confirms pass/fail status
- No need to remove/restore power


Viewing Distance: (meters)

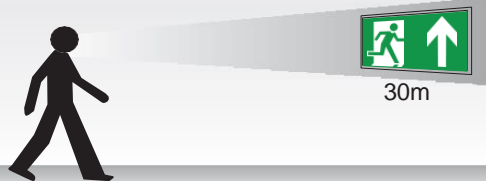

Note: Image not to scale and for pictorial reference only




Self-Test option carries out automatic testing: Monthly 10 Minute Test
Yearly 3-Hour Full Discharge Test

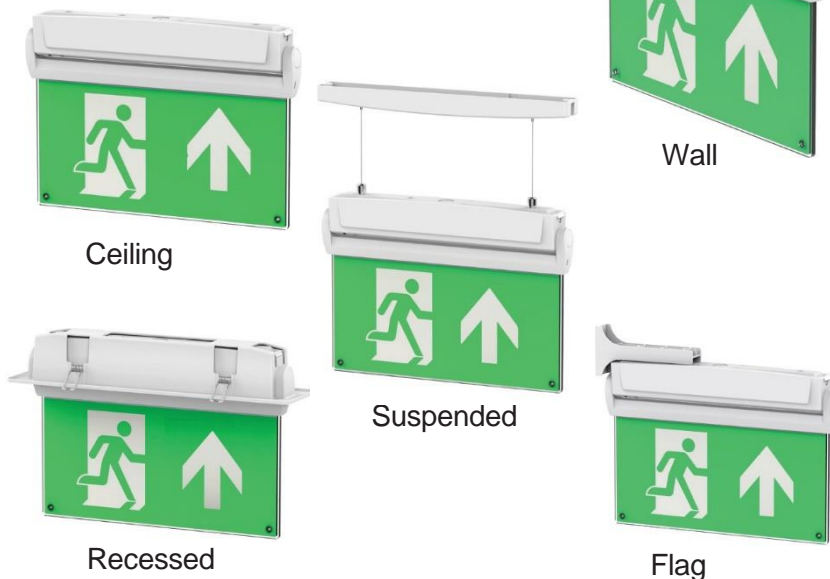

SPECIFICATIONS

Light Source	SMT LED 3W
IP Rating	IP50
Emergency Duration	3 hours (minimum)
Mains Voltage	230V 50Hz \pm 10%
Mains Current	(max) 150mA (max) 35mA quiescent (3W)
Recharge Periods	Less than 24 hour
Charge Indicator	Integral green LED & red fault LED
Changeover Voltage	As per the requirements of BS EN 60598-2-22
Temperature Range	5°C to 40°C
Weight	800gm
Battery	LiFePO4 3.2V 1500mAh
Material & Finish	Polycarbonate construction, white finish
Size	344W x 237H x 42Dmm (Excludes brackets)

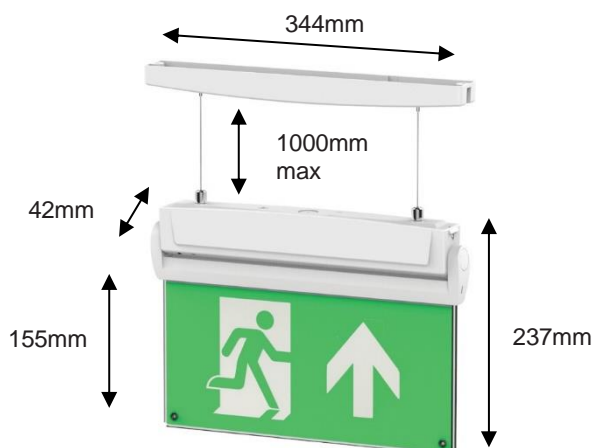

PRODUCT CODE	DESCRIPTION
E/5in1/LI	5-in-1 LED exit sign c/w full legend set and five mounting option brackets
E/EM/RC	Remote control test unit (Optional)
E/5in1/ST/LI	5-in-1 LED Self-Test exit sign c/w full legend set and five mounting option brackets

Errors & omissions excepted. Specification is subject to change without notice.